

OPERATION

- Cultivate at a slow tractor speed.
- Additional weight is not normally required for cultivating light soil. However, it is necessary when soil is heavy, crusted, and/or thickly weeded, in order to improve the cultivator's penetration and stability.

- A concrete block should be attached to the center of the pull bar with the 3/8" x 9-1/2" Rod Tie-down, Plain Washer, Lock Washer, and Hex Nut furnished.
- Cultivating depth can be controlled by use of adjustable Gauge Shoes (item 7, Fig.8).

CUSTOMER RESPONSIBILITY


- The cultivator is essentially maintenance-free, however, as with any steel product, it can rust. For rust on Gauge Shoes and Shanks, apply a light coat of oil.

- For rust on Mounting Bracket and Frame parts, sand and apply a light coat of enamel paint.

TO ORDER PARTS:

BRINLY-HARDY COMPANY
P.O. BOX 18
JEFFERSONVILLE, IN
47131-0018

Model CC-550

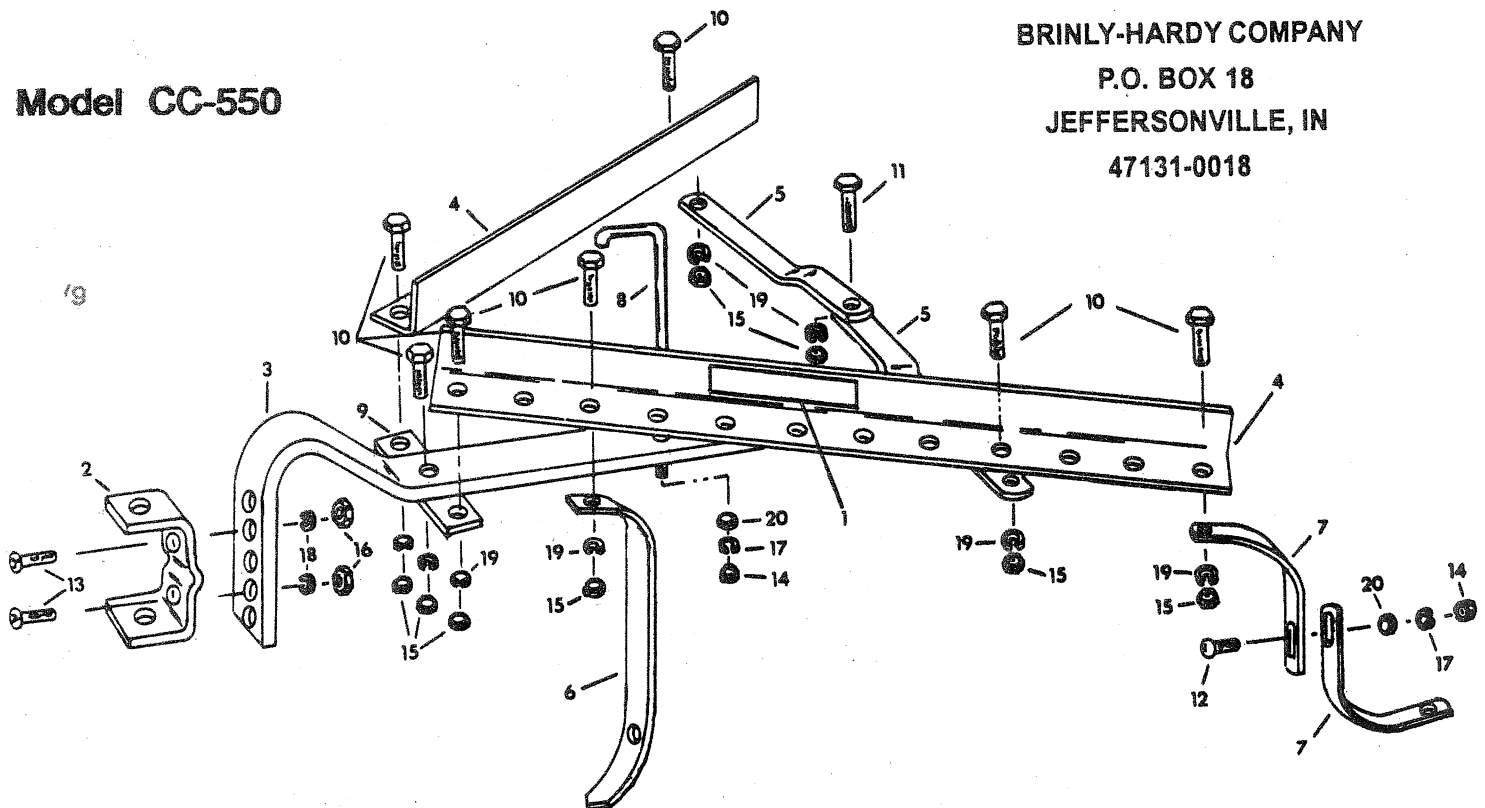

PARTS LIST

Ref. No.	Part No.	Description	Qty.	Ref. No.	Part No.	Description	Qty.
1.	B-4684	Logo Decal	1	11.	1M1632P	Hex Bolt 1/2" x 2"	1
2.	C-362-10	Hitch Bracket	1	12.	11M1216P	Carriage Bolt 3/8" x 1"	2
3.	C-363-10	Pull Bar	1	13.	15M1428P	Plow Bolt 7/16" x 1-3/4"	2
4.	C-364-10	Frame Angle	2	14.	30M1200P	Hex Nut 3/8"	3
5.	C-365-10	Frame Tie Bar	2	15.	30M1600P	Hex Nut 1/2"	14
6.	C-366-10	Rigid Shank	7	16.	30M1400P	Hex Nut, 7/16"	2
7.	C-367-10	Gauge Shoe Half	4	17.	40M1200P	Lock Washer 3/8"	3
8.	C-368	Rod Tie-Down	1	18.	40M1400P	Lock Washer 7/16"	2
9.	C-369-10	Tie Strap	1	19.	40M1600P	Lock Washer 1/2"	15
10.	1M1624P	Hex Bolt 1/2" x 1-1/2"	13	20.	45M1313P	Plain Washer 3/8"	3